



FEEL THE SW DIFFERENCE[®]

DESIGNED TO ENHANCE WORKER PERFORMANCE.

PowerForm[®]

PF-95BL

POWDER-FREE ECOTEK BIODEGRADABLE NITRILE EXAMINATION GLOVES WITH DRY CORE*

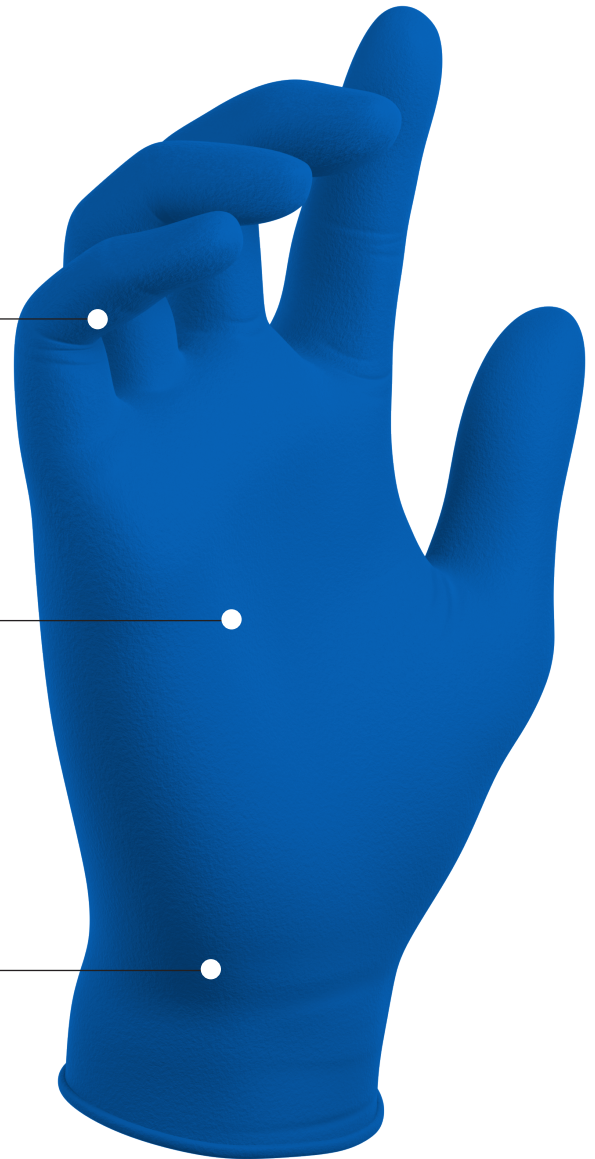
KEEP HANDS COOLER AND MORE COMFORTABLE WITH PREMIUM EXAM QUALITY NITRILE GLOVES, FEATURING UNIQUE DRY CORE MOISTURE MANAGEMENT TECHNOLOGY.

- Dry Core[®] Moisture Management Technology pulls sweat away from the skin
- EcoTek[®] Biodegradability Technology accelerates landfill breakdown without any performance loss*
- Breach Alert[®] Visual Detection Technology provides durable 2-ply construction and contrasting inner color
- Silicone-free for critical environments





ANSI Level 3 Abrasion Protection

Fully textured surface for wet and dry grip

Tear-resistant beaded cuff for easy donning



PF **PF-95BL**

WEIGHT	LENGTH	THICKNESS	FEATURES	COLOR
 8.5g (large size)	 9.5"	 6.1 mil	Dry Core [®] EcoTek [®]	 BLUE

ECOTEK



SW[®]
33278 Central Avenue, Unit 102, Union City, CA 94587, USA
Tel: +1.510.429.8692 | Fax: +1.510.487.5347

Trademarks and registered trademarks are the property of SW and its affiliates.
©2022 SW. All rights reserved.



TECHNICAL DATA



PF-95BL POWDER-FREE ECOTEK BIODEGRADABLE NITRILE EXAMINATION GLOVES WITH DRY CORE*



PRODUCT DESCRIPTION

SPECIFICATIONS

PRODUCT	PowerForm®		
GRADE	Powder-Free Exam		
MATERIAL	Nitrile		
THICKNESS	FINGER	6.9mil	0.18mm
	PALM	6.1mil	0.16mm
	CUFF	5.1mil	0.13mm
COLOR	OUTER	Blue	
	INNER	White	
SURFACE	OUTER	Fully Textured	
	INNER	Dry Core®	
LENGTH	9.5"	242mm	
WEIGHT	8.5g		
FIT TYPE	Ambidextrous		
CUFF TYPE	Beaded		
WATERTIGHT AQL	1.5		
ORIGIN COUNTRY	China		

* Specifications based on size Large glove

PHYSICAL PROPERTIES

	PRE-AGING	POST-AGING
TENSILE STRENGTH:	20 MPa	19 MPa
ELONGATION:	560%	550%

INTEGRATED TECHNOLOGIES

DRY CORE Moisture Management Technology: Absorbent lining wicks away moisture for added comfort in extended use.

ECOTEK Biodegradability Technology: 92.6% biodegradable in 2.5 years. ASTM D5526-12 test results do not predict future biodegradation.*

BREACH ALERT Visual Detection Technology: provides durable 2-ply construction and contrasting inner color



STANDARDS & CERTIFICATIONS

EN ISO 21420:2020
EN 455-2000-2015
ASTM D6319-19
ASTM F1671-13
ASTM F739-12
Reach EU 1907/2006
EU 2016/425

ANSI/ISEA 105-2016
CAT III Complex Design
FDA 21 CFR 177.2600



Please visit swsafety.com/symbols for information on standards used on this document.

ORDERING

ITEM NO.	SIZE	PALM WIDTH	PACKAGING
N106551	XS 5½ – 6	3.0" 76mm	50 gloves per box 10 boxes per case
N106552	S 6½ – 7	3.4" 87mm	50 gloves per box 10 boxes per case
N106553	M 7½ – 8	3.8" 97mm	50 gloves per box 10 boxes per case
N106554	L 8½ – 9	4.3" 109mm	50 gloves per box 10 boxes per case
N106555	XL 9½ – 10	4.5" 114mm	50 gloves per box 10 boxes per case
N106556	2XL 10½ – 11	4.9" 125mm	50 gloves per box 10 boxes per case

APPLICATIONS

- INDUSTRIAL**
 - Agriculture
 - Hydroponics
 - Assembly
- MEDICAL**
 - Chemical Handling
 - Clinical
 - Laboratory
 - Liquid Handling
 - Pharma Production
 - Tattooing and Cosmetics

Keep out of sunlight. Store in a cool, dry place. Keep away from sources of ozone or ignition.



R_N10655X1121



SW®
33278 Central Avenue, Unit 102, Union City, CA 94587, USA
Tel: +1.510.429.8692 | Fax: +1.510.487.5347

Trademarks and registered trademarks are the property of SW and its affiliates. ©2022 SW. All rights reserved.



*Under test method ASTM D5526-12, a standard test method for determining anaerobic biodegradation of plastics in accelerated landfill conditions. Current biodegradation results do not predict future results.