



FEEL THE SW DIFFERENCE[®]

DESIGNED TO ENHANCE WORKER PERFORMANCE.

PowerForm[®]

PF-95GY

SWEAT ABSORBING EXAMINATION ECOTEK BIODEGRADABLE NITRILE SINGLE-USE GLOVES*


WORK WITH CONFIDENCE AND COMFORT IN BIODEGRADABLE GLOVES WITH EXCLUSIVE DRITEK SWEAT MANAGEMENT TECHNOLOGY*

- DriTek[®] Comfort Technology with absorbent lining that wicks away moisture for all day comfort
- EcoTek[®] Biodegradability Technology accelerates landfill breakdown without any performance loss*
- Silicone-free for critical environments
- Exceeds 1.5 AQL laboratory standards





ANSI Level 3 Abrasion and ANSI Level 1 Puncture resistance

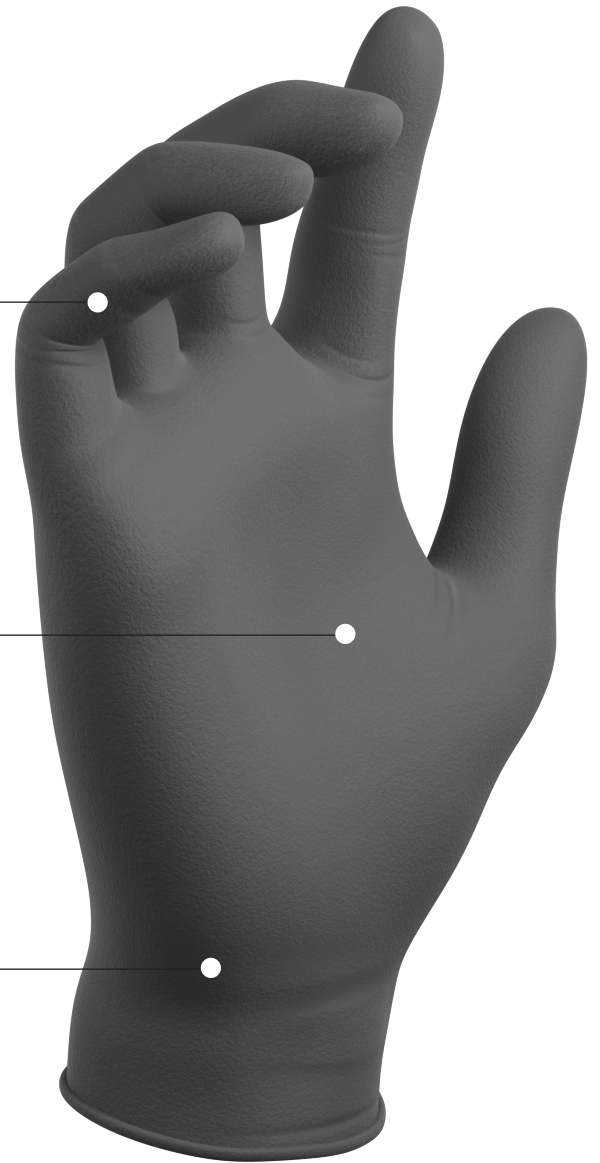Fully textured surface for wet and dry grip

Tear-resistant beaded cuff for easy donning



PF **PF-95GY**

WEIGHT	LENGTH	THICKNESS	FEATURES	COLOR
 8.8g (large size)	 9.5"	 6.2 mil	DriTek [®] EcoTek [®]	 GRAY

ECOTEK



SW[®]
33278 Central Avenue, Unit 102, Union City, CA 94587, USA
Tel: +1.510.429.8692 | Fax: +1.510.487.5347

Trademarks and registered trademarks are the property of SW and its affiliates.
©2022 SW. All rights reserved.



TECHNICAL DATA



PF-95GY

SWEAT ABSORBING EXAMINATION ECOTEK
BIODEGRADABLE NITRILE SINGLE-USE GLOVES*



PRODUCT DESCRIPTION

SPECIFICATIONS

PRODUCT	PowerForm®		
GRADE	Powder-Free Exam		
MATERIAL	Nitrile		
THICKNESS	FINGER	8.2mil	0.21mm
	PALM	6.2mil	0.16mm
	CUFF	5.9mil	0.15mm
COLOR	Gray		
SURFACE	OUTER	Fully Textured	
	INNER	DriTek®	
LENGTH	9.5"	242mm	
WEIGHT	8.8g		
FIT TYPE	Ambidextrous		
CUFF TYPE	Beaded		
WATERTIGHT AQL	1.5		
ORIGIN COUNTRY	China		

PHYSICAL PROPERTIES

	PRE-AGING	POST-AGING
TENSILE STRENGTH:	15 MPa	15 MPa
ELONGATION:	550%	500%

INTEGRATED TECHNOLOGIES

DRITEK Comfort Technology:
Advanced flock lining is a soft cotton nitrile glove lining that wicks away moisture for added comfort in extended use.

ECOTEK Biodegradability Technology: 92.6% biodegradable in 2.5 years. ASTM D5526-12 test results do not predict future biodegradation.*

100% Air Inspected




* Specifications based on size Large glove

STANDARDS & CERTIFICATIONS

EN ISO 21420:2020
EN 455-2000-2015
ASTM D6319-19
ASTM D6978-05 (2019)
ASTM F1671-13
ASTM F739-12
Reach EU 1907/2006

EU 2016/425
ANSI/ISEA 105-2016
CAT III Complex Design
FDA 21 CFR 177.2600

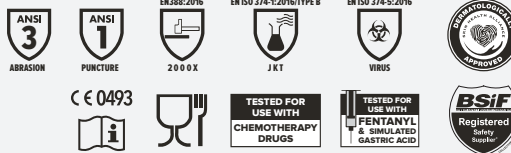

Please visit swsafety.com/symbols for information on standards used on this document.

ORDERING

ITEM NO.	SIZE	PALM WIDTH	PACKAGING
N260501	XS 6½ – 7	3.0" 75mm	50 gloves per box 10 boxes per case
N260502	S 6½ – 7	3.3" 85mm	50 gloves per box 10 boxes per case
N260503	M 7½ – 8	3.7" 95mm	50 gloves per box 10 boxes per case
N260504	L 8½ – 9	4.2" 107mm	50 gloves per box 10 boxes per case
N260505	XL 9½ – 10	4.5" 114mm	50 gloves per box 10 boxes per case
N260506	2XL 10½ – 11	4.9" 124mm	50 gloves per box 10 boxes per case

APPLICATIONS

- INDUSTRIAL**
- Assembly
 - Engine & Equipment
 - Repair/Maintenance
 - General Purpose
 - Inspection/ Quality Assurance
 - Painting & Tool Cleaning
 - Refinery/Oil
 - Wet, Oily Parts Handling

- MEDICAL**
- First Responder EMS
 - Laboratory Cleaning
 - Handling and Packaging
 - Tattooing and Cosmetics

Keep out of sunlight. Store in a cool, dry place.
Keep away from sources of ozone or ignition.



R_N26050X1121



SW®
33278 Central Avenue, Unit 102, Union City, CA 94587, USA
Tel: +1.510.429.8692 | Fax: +1.510.487.5347

Trademarks and registered trademarks are the property of SW and its affiliates.
©2022 SW. All rights reserved.



*Under test method ASTM D5526-12, a standard test method for determining anaerobic biodegradation of plastics in accelerated landfill conditions. Current biodegradation results do not predict future results.