



DURABILITY THAT'S ON CALL FOR THE TOUGHEST OF JOBS.

MegaMan[®]


SERIES 5903-8
 POWDER-FREE ECOTEK[®] BIODEGRADABLE
 SINGLE-USE GLOVES WITH DRITEK[®]*
 (Megaman[®])

SWEAT MANAGEMENT AND ANSI LEVEL 3 ABRASION RESISTANCE FOR THE ULTIMATE IN COMFORT AND PERFORMANCE

- DriTek[®] Comfort Technology with absorbent lining wicks away moisture for all day comfort
- EcoTek[®] Biodegradability Technology accelerates landfill breakdown without any performance loss*
- ANSI/EN Level 3 abrasion resistance for durability and extended wear
- Fully textured surface for excellent grip
- Optimal thickness for durability and tactile sensitivity
- Up to 3x longer lasting than standard nitrile gloves
- SHA Dermatologically Approved

SERIES 5903-8

WEIGHT	LENGTH	THICKNESS	FEATURES	COLOR	ECOTEK [®]
 12.8g (large size)	 11.0" 280mm	 8.5 mil	DriTek [®] EcoTek [®]	 BLACK	

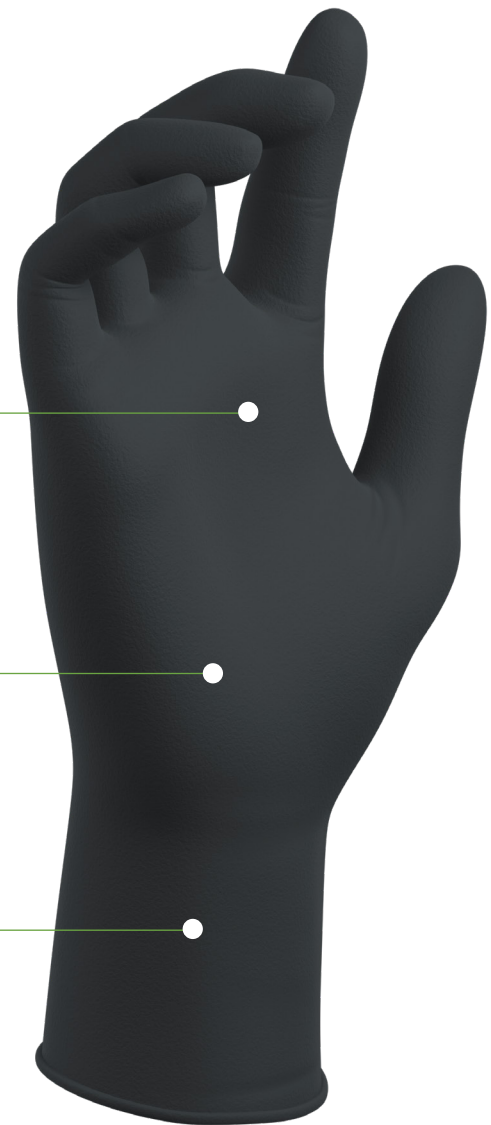

ANSI Level 3
Abrasion resistance

Fully textured
surface for wet
and dry grip

Tear-resistant
beaded cuff for
easy donning

DriTek[®] EcoTek[®]



TECHNICAL DATA



SERIES 5903-8 POWDER-FREE ECOTEK® BIODEGRADABLE SINGLE-USE GLOVES WITH DRITEK®*

(Megaman®)



PRODUCT DESCRIPTION

SPECIFICATIONS

PRODUCT	MegaMan
GRADE	Powder-Free Industrial
MATERIAL	Nitrile
THICKNESS	FINGER 10.1mil 0.26mm
	PALM 8.5mil 0.22mm
	CUFF 7.0mil 0.18mm
COLOR	Black
SURFACE	OUTER Fully Textured
	INNER DriTek®
LENGTH	11" 280mm
WEIGHT	12.8g
FIT TYPE	Ambidextrous
CUFF TYPE	Beaded
WATERTIGHT AQL	1.5
ORIGIN COUNTRY	China

PHYSICAL PROPERTIES

	PRE-AGING	POST-AGING
TENSILE STRENGTH:	17 MPa	16 MPa
ELONGATION:	560%	520%

INTEGRATED TECHNOLOGIES

DRITEK® Comfort Technology: Advanced flock lining is a powder-free, soft cotton-like nitrile glove lining that wicks away moisture for added comfort in extended use.


ECOTEK® Biodegradability Technology: 92.6% biodegradable in 2.5 years. ASTM D5526-12 test results do not predict future biodegradation.*

100% Air Inspected

* Specifications based on size Large glove

STANDARDS & CERTIFICATIONS

EN 420:2003	FDA 21 CFR 177.2600
REACH EU 1907/2006	Component materials comply with FDA
EU 2016/425	regulations for food contact
ANSI/ISEA 105-2016	
CAT III COMPLEX DESIGN	

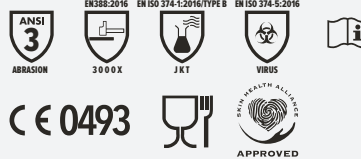

APPLICATIONS

- Assembly
- Chemical Handling
- Fabrication
- Janitorial Maintenance
- Light Machining Operations
- Maintenance
- Waste Management

SERIES 5903-8

SIZE	PALM WIDTH	PACKAGING
XS 5½ – 6	3.0" 76mm	50 gloves per box 10 boxes per case
S 6½ – 7	3.4" 87mm	50 gloves per box 10 boxes per case
M 7½ – 8	3.8" 97mm	50 gloves per box 10 boxes per case
L 8½ – 9	4.3" 109mm	50 gloves per box 10 boxes per case
XL 9½ – 10	4.5" 114mm	50 gloves per box 10 boxes per case
2XL 10½ – 11	4.9" 125mm	50 gloves per box 10 boxes per case
3XL 11½ – 12	5.3" 134mm	50 gloves per box 10 boxes per case

Keep out of sunlight. Store in a cool, dry place. Keep away from sources of ozone or ignition.



www.americanntex.com / www.peerlessmaterials.com 1-888-724-7864

*Under test method ASTM D5526-12, a standard test method for determining anaerobic biodegradation of plastics in accelerated landfill conditions. Current biodegradation results do not predict future results.